



BRAIDED FLEXIBLE CONNECTORS

Standard Braids are available in 1", 1-1/4", 1-3/8", 1-1/2", 2", 3", 4", 5" and 6" widths. Drilling patterns are NEMA standards. Ferrules are typically 3" long, but can be up to a maximum of 5-7/8". The copper can be either bare or tin plated.

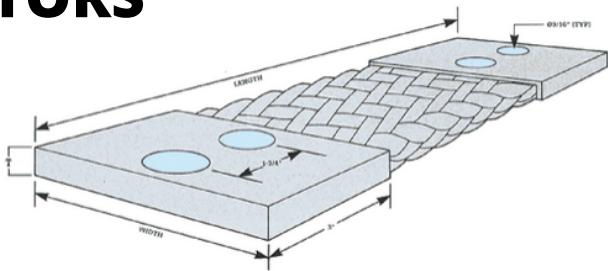


1" Wide Braided Connectors

| Ampacity | | Watteredge-Uniflex Part # |
|----------|------|---------------------------|
| 30°C | 50°C | |
| 180 | 2345 | 1 - 180 |
| 275 | 360 | 1 - 275 |
| 350 | 460 | 1 - 350 |
| 420 | 550 | 1 - 420 |

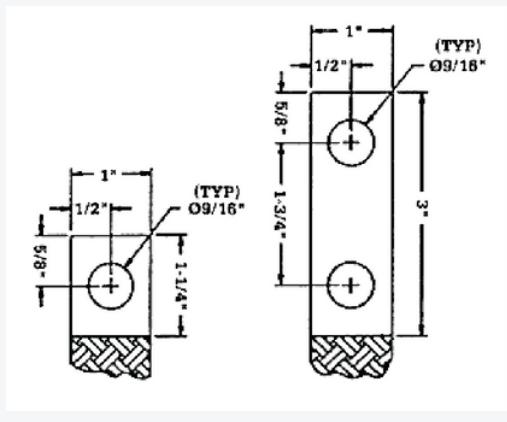

Questions?
Contact our customer service team.

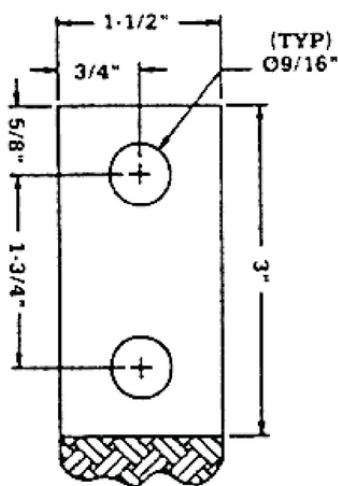

1-1/2" Wide Braided Connectors

| Ampacity | | Watteredge-Uniflex Part # |
|----------|------|---------------------------|
| 30°C | 50°C | |
| 240 | 315 | 1.5 - 240 |
| 350 | 460 | 1.5 - 350 |
| 450 | 590 | 1.5 - 450 |
| 540 | 710 | 1.5 - 540 |
| 625 | 825 | 1.5 - 625 |
| 705 | 930 | 1.5 - 705 |
| 785 | 1035 | 1.5 - 785 |
| 865 | 1140 | 1.5 - 865 |
| 945 | 1245 | 1.5 - 945 |
| 1020 | 1345 | 1.5 - 1020 |
| 1095 | 1445 | 1.5 - 1095 |
| 1175 | 1550 | 1.5 - 1175 |
| 1250 | 1650 | 1.5 - 1250 |
| 1325 | 1745 | 1.5 - 1325 |
| 1400 | 1845 | 1.5 - 1400 |
| 1475 | 1945 | 1.5 - 1475 |
| 1550 | 2045 | 1.5 - 1550 |
| 1620 | 2140 | 1.5 - 1620 |
| 1695 | 2235 | 1.5 - 1695 |
| 1775 | 2340 | 1.5 - 1775 |
| 1850 | 2440 | 1.5 - 1850 |
| 1920 | 2535 | 1.5 - 1920 |
| 2000 | 2640 | 1.5 - 2000 |



T. J. SNOW

120 Nowlin Lane • Chattanooga, TN 37421 • (423) 894-6234 • welders@tjsnow.com


BRAIDED FLEXIBLE CONNECTORS

Larger Widths of Braided Connectors



| Description | Terminal Thickness | Terminal Width | Ampacity | |
|----------------|--------------------|----------------|----------|------|
| | | | 30°C | 50°C |
| 420 MCM 2 X 2 | 3/8 | 2 | 569 | 755 |
| 603 MCM 2 X 3 | 1/2 | 2 | 724 | 961 |
| 840 MCM 2 X 4 | 5/8 | 2 | 866 | 1149 |
| 1050 MCM 2 X 5 | 3/4 | 2 | 1000 | 1328 |
| 630 MCM 3 X 2 | 3/8 | 3 | 801 | 1062 |
| 945 MCM 3 X 3 | 1/2 | 3 | 1007 | 1337 |
| 1260 MCM 3 X 4 | 5/8 | 3 | 1194 | 1584 |
| 1575 MCM 3 X 5 | 3/4 | 3 | 1367 | 1814 |
| 840 MCM 4 X 2 | 3/8 | 4 | 1026 | 1361 |
| 1260 MCM 4 X 3 | 1/2 | 4 | 1284 | 1703 |
| 1680 MCM 4 X 4 | 5/8 | 4 | 1512 | 2006 |
| 2100 MCM 4 X 5 | 3/4 | 4 | 1724 | 2286 |
| 1050 MCM 5 X 2 | 3/8 | 5 | 1284 | 1654 |
| 1575 MCM 5 X 3 | 1/2 | 5 | 1554 | 2061 |
| 2100 MCM 5 X 4 | 5/8 | 5 | 1825 | 2420 |
| 2625 MCM 5 X 5 | 3/4 | 5 | 2073 | 2749 |
| 1260 MCM 6 X 2 | 3/8 | 6 | 1465 | 1943 |
| 1890 MCM 6 X 3 | 1/2 | 6 | 1821 | 2414 |
| 2520 MCM 6 X 4 | 5/8 | 6 | 2132 | 2827 |
| 3150 MCM 6 X 5 | 3/4 | 6 | 2417 | 3204 |

For questions regarding cable sizing, contact our customer service team.

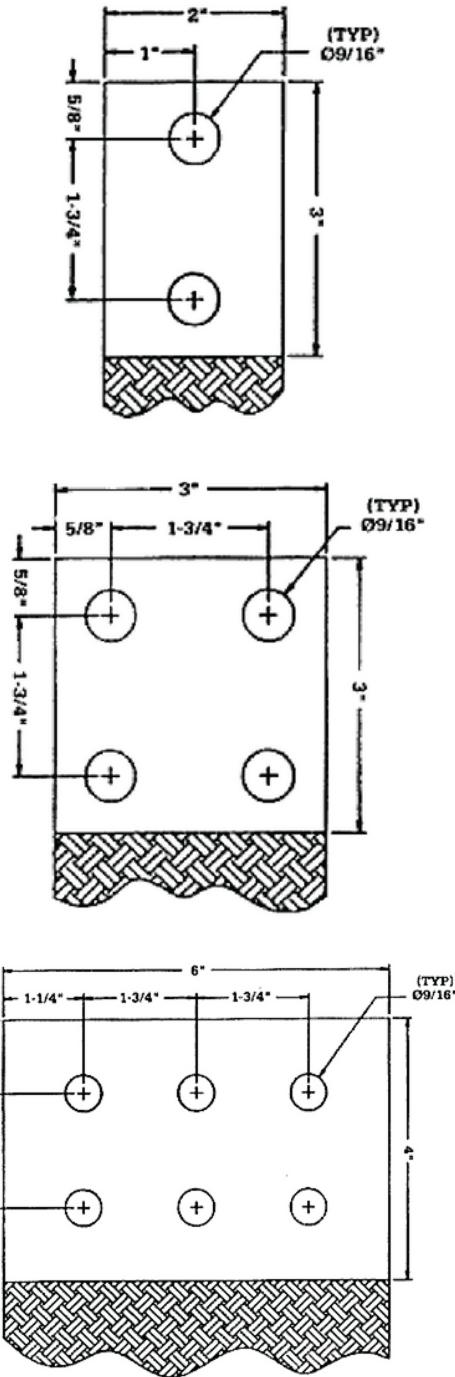

T. J. SNOW

120 Nowlin Lane • Chattanooga, TN 37421 • (423) 894-6234 • welders@tjsnow.com