

GOLDCROWN® EJECTOR HOLDERS with self-adjusting water tubes


TUFFALOY Goldcrown® premium ejector holders are made of Class 2 (C18200) alloy and are ground and polished to yield greatest conductivity. These straight tip-ejecting holders deliver dependable, first class performance and are designed with maximum simplicity to require minimum maintenance. All TUFFALOY straight holders feature exclusive spring-loaded self-adjusting water tubes to ensure the proper flow of coolant through resistance welding electrodes. The larger ejector holders incorporate bigger fittings for higher coolant flow rates.

REPLACEMENT ADAPTERS FOR THREADED BARRELS


Part No.	Description	Taper	THD
195-8550	8550	4RW	5/8-14 NPT
195-8551	8551	5RW	5/8-14 NPT
190-3615	AD-346-1.5	6RW	3/4-14 NPT

These adapters are supplied with -A suffix holder

GOLDCROWN				
Barrel Dia.	Tip Socket RW	Barrel Length	Description	Part No.
5/8	4	8	E-05084	320-0100
5/8	4	12	E-05124	320-0120
3/4	4	8	E-06084	320-0140
3/4	5	8	E-06085	320-0150
3/4	4	12	E-06124	320-0160
3/4	5	12	E-06125	320-0170
7/8	4	8	E-07084	320-0180
7/8	5	8	E-07085	320-0190
7/8	4	12	E-07124	320-0200
7/8	5	12	E-07125	320-0210
1	4	8	E-08084	320-0220
1	4	8	E-08084-A	320-0225
1	5	8	E-08085	320-0230
1	5	8	E-08085-A	320-0235
1	6	8	E-08086	320-0240
1	4	12	E-08124	320-0250
1	4	12	E-08124-A	320-0255
1	5	12	E-08125	320-0260
1	5	12	E-08125-A	320-0265
1	6	12	E-08126	320-0270
1-1/4	4	8	E-10084	320-0280
1-1/4	4	8	E-10084-A	320-0285
1-1/4	5	8	E-10085	320-0290
1-1/4	5	8	E-10085-A	320-0295
1-1/4	6	8	E-10086	320-0300
1-1/4	7	8	E-10087	320-0310
1-1/4	4	12	E-10124	320-0320
1-1/4	4	12	E-10124-A	320-0325
1-1/4	5	12	E-10125	320-0330
1-1/4	5	12	E-10125-A	320-0335
1-1/4	6	12	E-10126	320-0340
1-1/4	7	12	E-10127	320-0350
1-1/2	4	8	E-12084	320-0360
1-1/2	4	8	E-12084-A	320-0365
1-1/2	5	8	E-12085	320-0370
1-1/2	5	8	E-12085-A	320-0375
1-1/2	6	8	E-12086	320-0380
1-1/2	6	8	E-12086-A	320-0385
1-1/2	7	8	E-12087	320-0390
1-1/2	4	12	E-12124	320-0410
1-1/2	4	12	E-12124-A	320-0415
1-1/2	5	12	E-12125	320-0420
1-1/2	5	12	E-12125-A	320-0425
1-1/2	6	12	E-12126	320-0440
1-1/2	7	12	E-12127	320-0450

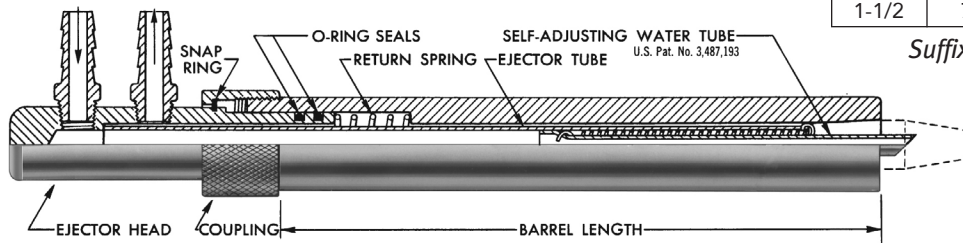

Cross-section of holders with barrels 1 inch or more in diameter.

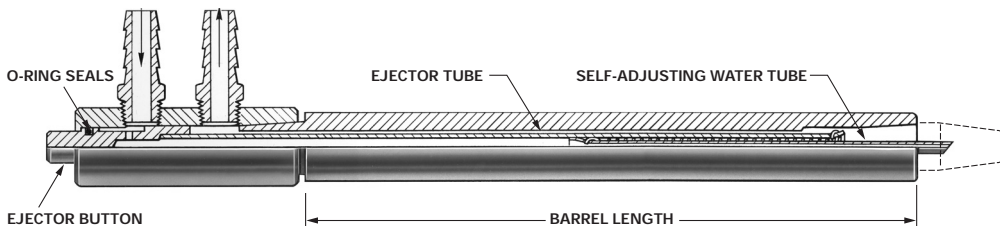

Cross-section of holders with barrels 7/8 inch or less in diameter.

Suffix "-A" in holder description denotes a threaded tip adapter is supplied

